


EXFIL[®] BALLISTIC EAR COVERS

INSTALLATION INSTRUCTIONS

helmet accessories —

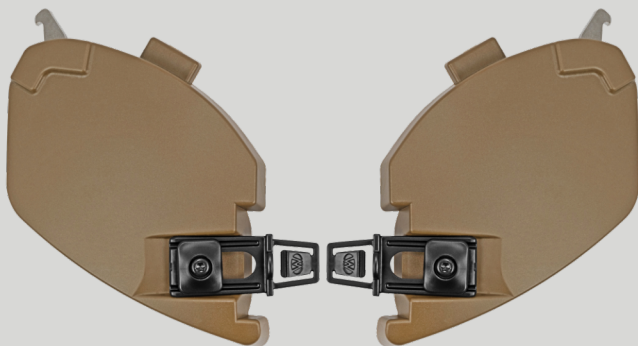

INNOVATE TO PROTECT



PURPOSE

Provide scalable ballistic protection and are quickly and easily installed without tools onto the EXFIL® Rail 2.0 or EXFIL® Rail 3.0 mounting systems of the EXFIL® Ballistic or EXFIL® Ballistic SL.

CONTENTS

- Two (2) Ear Covers (Right and Left)

PERFORMANCE STANDARDS

17gr V0 $\geq$ 731 m/s (2400 ft/s)

Ballistic performance in accordance with Team Wendy test protocol TW-TP-2101

INSTALLATION

STEP 1

Slide the front hook into the front slot on the bottom of the accessory rail as shown in figure 1. Ensure the front hook is fully inserted so that the top tab aligns with the slot below the W spacer plate (figure 2).



FIG 1



FIG 2

STEP 2

Insert the top tab into the center slot on the bottom of the accessory rail as shown in figures 3 and 4. Note that the ear can be installed with or without the W spacer plate installed on the accessory rail.

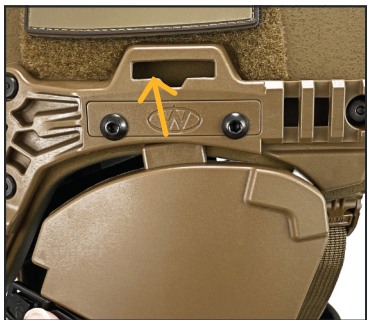


FIG 3



FIG 4

STEP 3

Push the center release clip into the O2 Clip Insert on the rear of the accessory rail (figure 5). Push until the center release clip passes the rail bar and locks into place (figure 6). To release, press down on the center release clip and push forward.



FIG 5



FIG 6

G453-1