


MAGPUL® MOE® 5-SLOT MOUNTING KIT

INSTALLATION INSTRUCTIONS

helmet accessories —

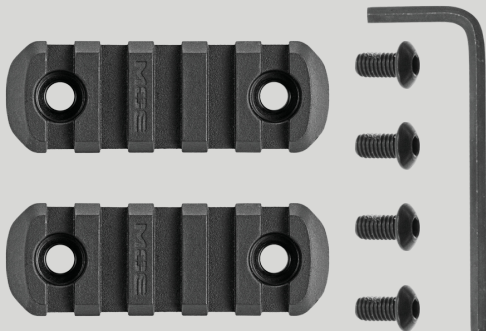

INNOVATE TO PROTECT



PURPOSE

Provides an attachment method for headborne accessories with Picatinny-style mounting options. Compatible with the EXFIL® Rail 2.0, EXFIL® Rail 3.0 and Team Wendy® SAR Rail systems.

CONTENTS

- Two (2) 5-Slot Magpul® MOE® Polymer Rails
- Four (4) 3/8" 10-32 Screws
- One (1) Allen Key

INSTALLATION

STEP 1

Remove both of the original 5/16" screws currently holding the W spacer plate (figures 1A and 1B). Leave the W spacer plate in place.

STEP 2

Place the Picatinny rail on top of the W spacer plate, aligning the holes for the screws. Use the included 3/8" screws to mount the Picatinny rail on top of the W spacer plate as shown in figures 2A and 2B.



FIG 1A | EXFIL® Rail 2.0



FIG 1B | EXFIL® Rail 3.0

STEP 3

Repeat on the other rail if desired. Save the original screws for future use should you want to uninstall the Picatinny rail.



FIG 2A | EXFIL® Rail 2.0



FIG 2B | EXFIL® Rail 3.0

G459